


Outline Drawing (Size: mm)

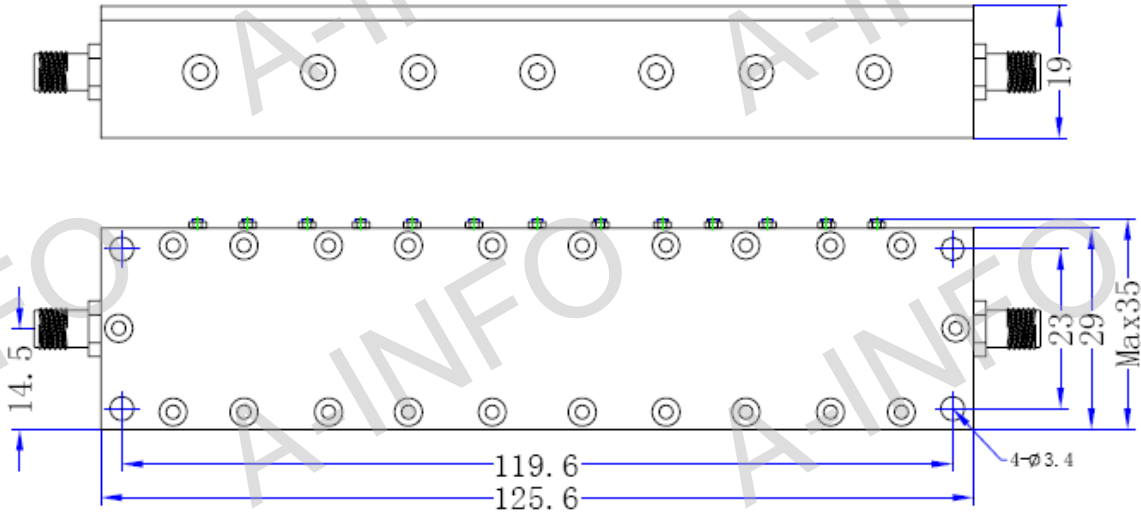

Technical Specification

Item	Technical Specification
Frequency Range(GHz)	1950-2095
Insertion Loss at Center Frequency(dB)	0.8
Rejection (dB@ MHz)	50 @1850 50 @2175
VSWR	1.5
Connector	SMA-Female
Operating Temperature(°C)	-40 ~ +80
Net Weight(Kg)	0.15 Around

Test Results

Insertion Loss (dB)	Rejection (dB)		VSWR
	1850MHz	2175MHz	
0.39	67.6	64.8	1.25